

Real solutions. Real metal to plastic choice.

Industry regulations and consumer demands change frequently – and as a result, so do your product needs. Let us help you understand how to reduce your product's weight and cost all while maintaining performance and quality.

Benefits of choosing plastic over metal:

- ▶ Cost reduction
- ▶ Weight reduction
- ▶ Design freedom
- ▶ Secondary operation elimination

Typical metal die-cast competition:

- ▶ Aluminum
- ▶ Magnesium
- ▶ Zinc

Type of Material	Abbreviation(s)	Recommended Tool Temperature (°C)	Hot Water Moldable	Surface Appearance	Heat Deflection at 264 psi (°C)	Tensile Strength (MPa)	Flexural Modulus (MPa)	Wear and Friction	Chemical Resistance	Tradenames	Advantages
High Performance Polyamide	HPPA	80-140	Yes	Better	255	285	21,500	Better	Better	Solvay Omnix®	<ul style="list-style-type: none"> • Excellent colorability • Higher heat resistance and lower moisture uptake than PA 6/6
Polyamide 4/6	PA 4/6	80-120	Yes	Better	290	260	18,500	Best	Better	DSM Stanyl®	<ul style="list-style-type: none"> • High crystallinity results in superior heat resistance and wear and friction performance • Great retention of mechanicals even at elevated temperatures
Polyamide 4T	PA 4T	100-150	—	Better	323	280	18,000	Better	Better	DSM ForTii® Ace	<ul style="list-style-type: none"> • Great blister resistance for reflow soldering • Good resistance to salts that attack PA 6 and PA 6/6
Polyamide 66/6I	PA 66/6I	65-120	Yes	Best	255	250	16,400	Better	Better	Asahi Kasei Leona®	<ul style="list-style-type: none"> • Excellent flowability • Great paintability and weatherability
Polyarylamide	PARA, PA MXD6	120-160	—	Best	255	290	33,000	Better	Better	Mitsubishi Reny® Solvay Ixef®	<ul style="list-style-type: none"> • Low moisture uptake for great dimensional stability • Great retention of mechanicals even at elevated temperatures
Polyphenylene Sulfide	PPS	135-150	—	Best	270	212	20,800	Better	Best	Solvay Ryton®	<ul style="list-style-type: none"> • Low moisture uptake for great dimensional stability • Inherently V-0 flame rated
Polyphthalamide	PPA	65-180	Yes	Better	310	280	22,800	Better	Better	DSM ForTii® Evonik Vestamid® Htplus Solvay Amodel®	<ul style="list-style-type: none"> • Lower and slower moisture uptake than PA 6/6 • Great retention of mechanicals even at elevated temperatures and high humidity

*HDT, Tensile, and Flex all based on grade with the highest value

Long fiber compounds:

Advantages

- Hot water moldable grades available
- High stiffness and heat deflection
- Availability in many different base resins




Specific Gravity Comparison

Material	Specific Gravity (g/cm ³)
Aluminum	2.7
Magnesium	1.74
Zinc	6.5
55% Glass PA 66/6I	1.64
50% Glass PPA	1.67
50% Glass PARA	1.65
50% Glass PA 4T	1.66
50% Glass PA 4/6	1.62
50% Glass HPPA	1.59
40% Glass PPS	1.69

Weight vs. Strength Comparison

Plastics show greater specific strength* compared to metals allowing applications to meet the strength requirements while reducing weight

Material

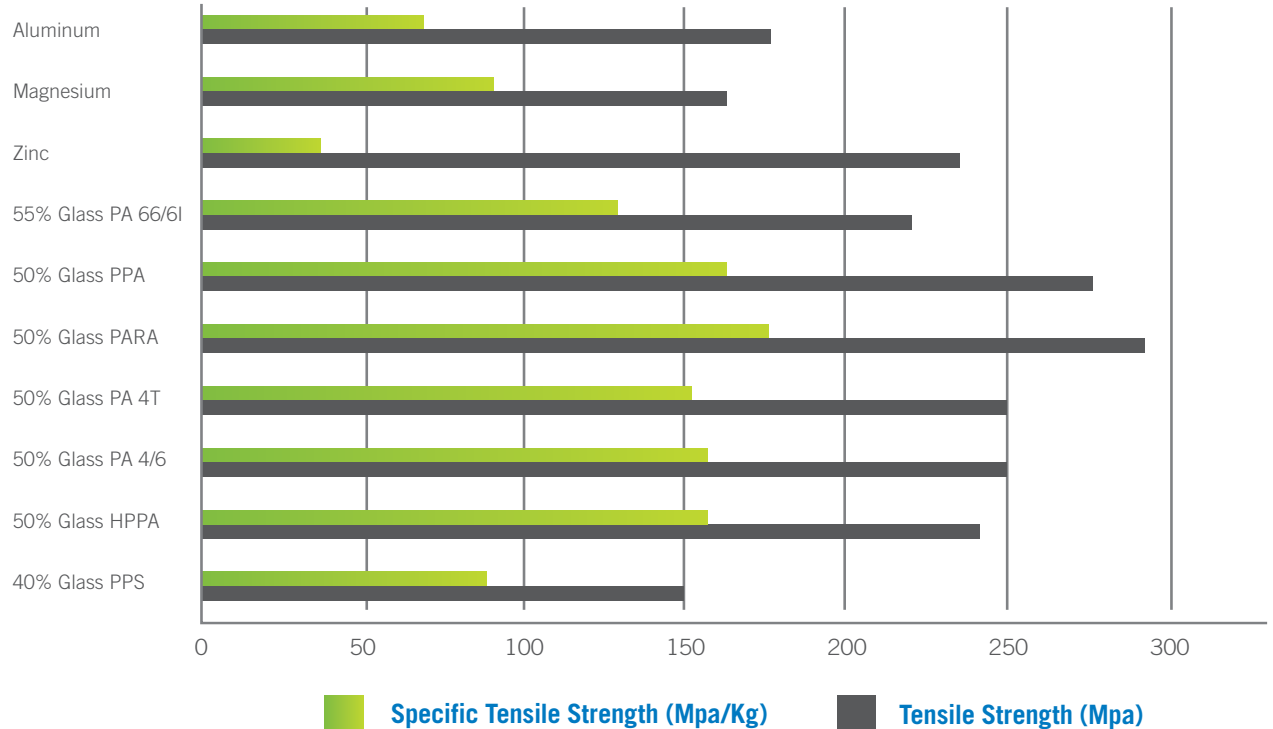

6467 Waldon Center Drive Clarkston, MI 48346

248.620.2120 • orders 800.232.4273

fax 248.620.3192

ChasePlastics.com



*Specific strength is a material's strength (force per unit area at failure) divided by its density. It is also known as the strength-to-weight ratio or strength/weight ratio.