

Real solutions. Real SABIC Specialties business LEXAN™ XHT copolymers.

LEXAN™ XHT copolymers are high heat polycarbonates that provide unmatched high temperature performance coupled with excellent processability and the highest retention of clarity and color stability when exposed to elevated temperatures.

The LEXAN™ XHT copolymers portfolio offers grades ranging in heat performance and melt flows to meet your needs without loss in clarity, color stability, or processability. The Chase Plastics' team can assist in selecting the proper LEXAN™ XHT copolymer grade to match the HDT and MVR requirements of each application.


LEXAN™ XHT Resin Portfolio

LEXAN™ XHT resins	Flow	HDT(°C) 0.45 MPa	Grades	Transparent	Mold Release	MVR	
						@330°C/2.16kg;ISO1133	
LEXAN™ XHT resins	High flow	168	XHT3171		XHT3176	39	
		160	XHT2171		XHT2176	56	
		150	XHT1171			91	
	Standard flow	183	XHT5141			XHT5146	17
		174	XHT4141	XHT4143T			24
		165	XHT3141	XHT3143T		XHT3146	30
155		XHT2141	XHT2143T		XHT2146	43	
145		XHT1141				70	

* Please consult a Chase Plastics' representative for grade availability and suitability for your application

LEXAN™ XHT Copolymers for Automotive Lighting

Parts such as lenses, reflectors, and bezels for automotive lighting assemblies require the elevated heat performance that LEXAN™ XHT copolymers were designed to offer. LEXAN™ XHT copolymers also offer improved dimensional stability and outgassing over PBT and better heat performance over standard PC. LEXAN™ XHT copolymers excel in all areas compared to these commonly used automotive lighting materials.

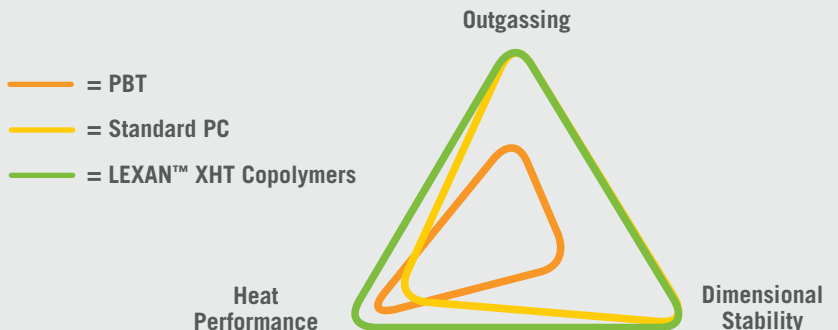


LEXAN™ XHT Copolymers Haze Onset Performance

Haze onset temperature is a commonly used test in the automotive industry to measure the amount of heat resistance in lighting. This test indicates the temperature at which a 3mm opaque metalized plaque shows defects.




Haze Onset Heat Exposure

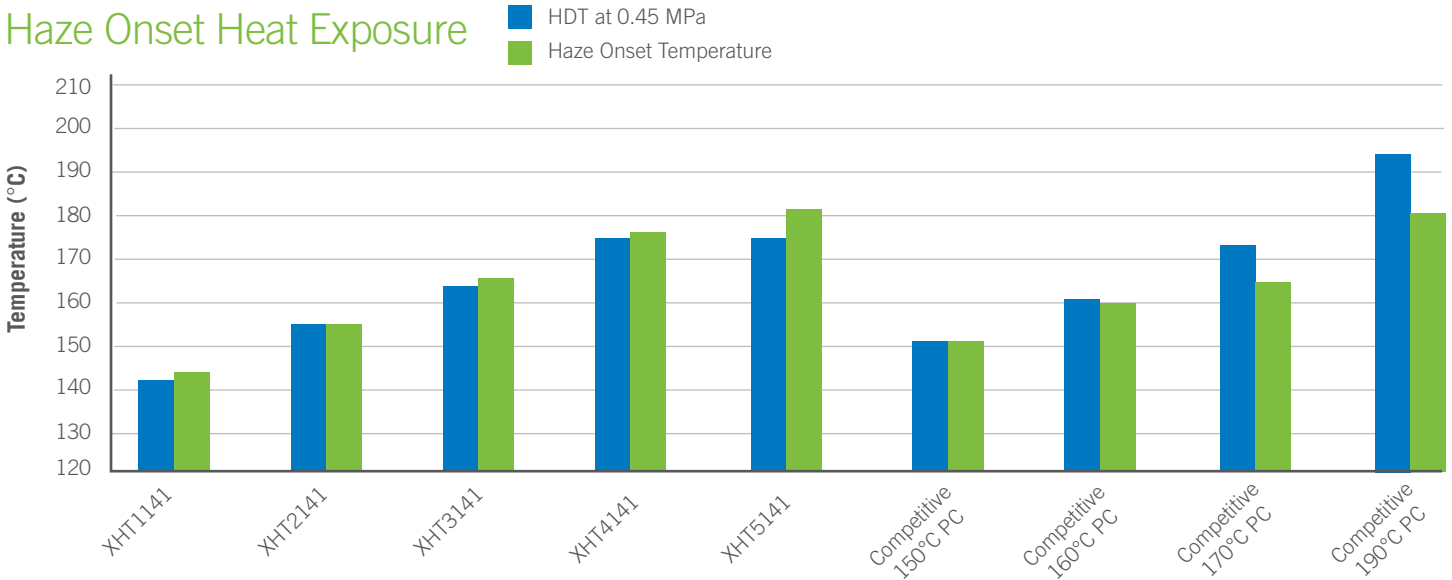

LEXAN™ XHT Copolymer High Flow Grades

Higher melt flow grades of LEXAN™ XHT copolymers offer the capability of thin wall molding for complex part design and lightweighting along with the ability to utilize lower injection pressures and lower processing temperatures for overall energy savings.

The high flow grades of LEXAN™ XHT copolymers maintain their excellent haze onset temperatures compared to competitive high heat polycarbonate materials, but with improved flowability.

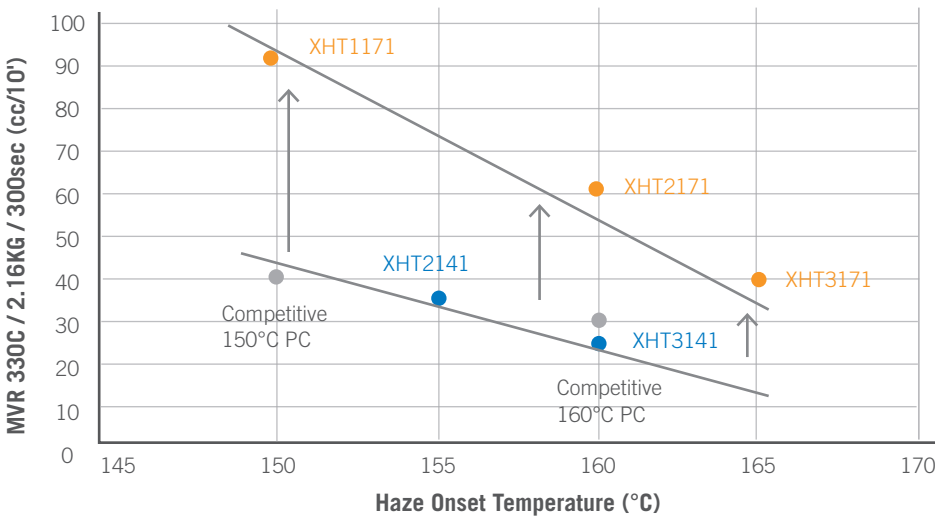

- High Flow LEXAN™ XHT Copolymer Grades
- LEXAN™ XHT Copolymer Grades
- Competitive High Heat PC Grades

Lightweighting with LEXAN™ XHT Copolymers

With the available high flow portfolio offered, thinner wall sections can be achieved, resulting in weight savings.

- Up to 50% weight savings vs direct metallized PBT
- Up to 30% weight savings vs competitive high heat polycarbonate materials

Design Freedom with LEXAN™ XHT Copolymers

- Direct metallizable
- Thinner walls achievable
- Lower draft angles required
- More complex part geometries
- Require less complex gating compared to other high heat polycarbonate materials



6467 Waldon Center Drive • Clarkston, MI 48346
248-620-2120 • orders 800-232-4273 • fax 248-620-3192

ChasePlastics.com



The marks identified herein are registered trademarks of their respective owners. Any recommendation by Chase Plastics' personnel for the use of any material is based on tests or experience believed to be reliable. However, since the final processing and use of the product are beyond our control, we make no warranty as to such use or effects incidental to such use, handling or sale.