

Real solutions. Real electronics choice.

In the performance-driven market of electrical and electronic components, our industry-leading product line meets the most stringent material requirements, offering the most competitive mechanical, thermal, electrical, and flame-retardant properties.

Material	UL 94 Flame Rating	RTI Electric	RTI Impact	RTI Strength	Chemical Resistance	Flowability (For Thin Walls)
Ascend Performance Materials						
Vydyne® PA 6/6 & 66/6	5VA at 1.5mm	150°C	140°C	150°C	Good	Excellent
Elastron						
Elastron V TPV	V-0 at 1.5mm	50°C	50°C	50°C	Good	Good
Envalior						
AKULON® PA 6	5VA at 1.5mm	140°C	110°C	140°C	Good	Excellent
ARNITEL® TPC	V-0 at 1.5mm	50°C	50°C	50°C	Excellent	Good
ARNITE® PBT	5VA at 2.0mm	140°C	150°C	140°C	Good	Excellent
ARNITE® PET	5VA at 2.1mm	130°C	120°C	125°C	Good	Excellent
ECOPAXX® PA 410	V-0 at 0.40mm	130°C	95°C	115°C	Good	Excellent
FORTII® PPA	V-0 at 0.15mm	85°C	85°C	85°C	Excellent	Excellent
DURETHAN® PA 6	5VA at 1.0mm	140°C	120°C	155°C	Good	Excellent
POCAN® PBT	5VA at 1.5mm	130°C	130°C	140°C	Good	Excellent
POCAN® PBT/ASA	5VA at 1.5mm	150°C	150°C	160°C	Good	Excellent
POCAN® PC/PBT	5VA at 1.5mm	140°C	75°C	130°C	Good	Good
STANYL® PA 46	5VA at 2.0mm	140°C	130°C	140°C	Excellent	Excellent
LG Chem						
LG ABS	5VA at 2.0mm	90°C	90°C	90°C	Fair	Good
Lupox® PBT	5VA at 3.0mm	130°C	130°C	140°C	Good	Excellent
Lupox® PC/PBT	5VA at 2.3mm	130°C	120°C	120°C	Good	Good
Lupoy® PC	5VA at 2.5mm	125°C	120°C	125°C	Fair	Good
Lupoy® PC/ABS	5VA at 1.5mm	60°C	60°C	60°C	Fair	Good
Mitsubishi Engineering Plastics Corporation						
Iupilon® PC	5VA at 2.5mm	120°C	120°C	125°C	Fair	Good
Novaduran™ PBT	5VA at 1.5mm	140°C	130°C	140°C	Good	Excellent
Novaduran™ PC/PBT	5VA at 3.0mm	140°C	120°C	125°C	Good	Good
SABIC's Specialties business						
ELCRESTM Copolymer resins (PC Copolymer)	5VA at 2.5mm	130°C	120°C	130°C	Fair	Good
LEXAN™ Copolymer resins (PC Copolymer)	5VA at 3.0mm	125°C	120°C	125°C	Fair	Good
NORYL™ resin (PPE+PS)	5VA at 2.0mm	110°C	105°C	110°C	Good	Excellent
NORYL GTX™ resin (PPE+PA)	5VA at 2.0mm	140°C	85°C	125°C	Good	Excellent
ULTEM™ resin (PEI)	5VA at 1.5mm	170°C	170°C	125°C	Good	Good
Syensqo						
Amodel® PPA	5VA at 1.0mm	140°C	115°C	115°C	Excellent	Excellent
Radel® PPSU	5VA at 1.5mm	180°C	180°C	180°C	Excellent	Excellent
Ryton® PPS	5VA at 1.5mm	240°C	220°C	240°C	Excellent	Excellent
Udel® PSU	V-0 at 3.0mm	160°C	140°C	160°C	Excellent	Good
Veradel® PESU	5VA at 1.5mm	180°C	180°C	180°C	Excellent	Good

*RTI values based on grade(s) with the most stringent flame rating at the thinnest section

Specialty and engineering thermoplastics for electrical/electronic needs now and in the future

- ▶ Electrically conductive compounds for EMI and RFI shielding
- ▶ High-temperature thermoplastics compatible with surface-mount technology (SMT) and lead-free soldering processes for use in connectors and other components
- ▶ Thermally conductive compounds for thermal management, heating, and cooling
- ▶ High-flow resins to meet miniaturization and thin-wall requirements
- ▶ RoHS- and WEEE-compliant compounds to meet “green” initiatives
- ▶ Soft-touch compounds for user comfort


Applications include:

- ▶ Connectors
- ▶ Switches
- ▶ Bobbins
- ▶ Capacitors
- ▶ Relays
- ▶ Housings
- ▶ Covers
- ▶ Shields
- ▶ Sockets
- ▶ Circuit Breakers

Your electronics choice

Specialty and engineering thermoplastics for the electrical/electronics market.

Short-Term Peak Temperature by Material Type

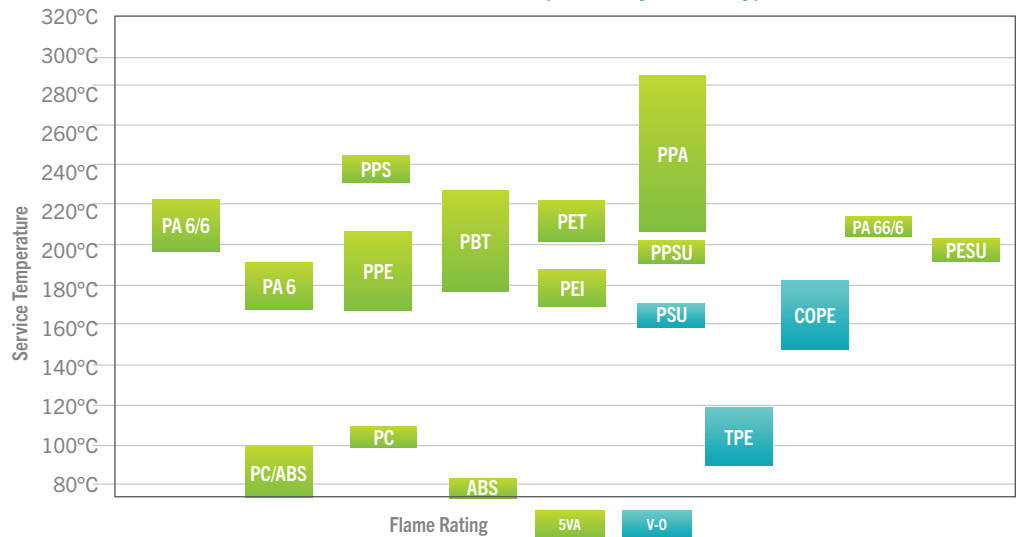

Thermoplastic Copolyester Elastomer (COPE/TPC)

- ▶ Excellent fatigue resistance for ease of assembly and continuous vibration
- ▶ Good chemical resistance and halogen-free flame retardancy
- ▶ Grades available in durometers ranging from 28-72 shore D

Electrically Conductive Compounds

- ▶ Compounds are formulated with additives to achieve the right balance of mechanical properties and resistivity for any point in the EM spectrum
- ▶ Available in a wide range of engineering materials including PA6, PA4/6, PA6/6, PA12, ABS, PC, POM, PPS and more
- ▶ Temperature resistance up to 280°C for soldering (IR and lead-free)
- ▶ Exceptional flow properties with high weld line strength for more robust and reliable connectors than with LCPs
- ▶ High pin retention strength, capable of withstanding high part assembly forces
- ▶ Outstanding toughness, capable of withstanding high part assembly forces

Polyamide (PA)

- ▶ Short-term high temperature resistance (260°C).
- ▶ Able to withstand lead-free solder temperatures without melting
- ▶ Excellent dielectric strength and comparative tracking index combined with an inherent V2 flame rating, which can be increased to V0 and improved to 5VA in some grades
- ▶ Electrically neutral grades and non-copper based options available
- ▶ High flow grades for thinner walls and longer flow lengths
- ▶ Grades of polyamides that are sustainable, made with castor bean oil (PA 4/10, PA 6/10)
- ▶ Grades of polyamides that are especially suited for high temperature wear and friction applications with excellent flow for thinner parts (PA 4/6)

Polyesters (PBT/PET)

- ▶ Excellent dimensional stability
- ▶ High rigidity and strength
- ▶ Outstanding heat aging performance and dielectric strength
- ▶ Improved hydrolytic stability compared to nylons
- ▶ Great electrical insulation properties

Polycarbonate/Polybutylene Terephthalate (PC/PBT)

- ▶ Excellent toughness even at low temperatures
- ▶ Improved chemical resistance to fuels
- ▶ Excellent weatherability and good UV resistance
- ▶ High color retention

Copolymer Polycarbonate (PC)

- ▶ Improved chemical resistance, weathering performance, and toughness compared to standard polycarbonate
- ▶ Good thin wall flame retardancy while maintaining transparency
- ▶ High heat portfolio combines heat resistance with excellent clarity and color stability
- ▶ Flame, smoke, and toxicity compliant grades available

Polycarbonate (PC)

- ▶ Flame rating up to 5VA, including non-halogenated options
- ▶ Excellent dimensional stability, clarity, and toughness
- ▶ Excellent creep resistance

Polyetherimide (PEI)

- ▶ Exceptional long-term high heat and chemical resistance
- ▶ Among the most dimensionally stable thermoplastics available. Filled grades offer tight dimensional tolerances.
- ▶ Inherent flame resistance without additives in most grades
- ▶ Extremely low smoke generation, flame spread, and toxicity
- ▶ Retain strength and resist stress cracking when exposed to automotive and aircraft fluids, aliphatic hydrocarbons, alcohols, acids, and weak aqueous solutions
- ▶ Infrared and microwave transparent

Polysulfones (PESU, PSU, PPSU)

- ▶ Long-term high heat capability
- ▶ Excellent chemical resistance and hydrolytic stability
- ▶ Good electrical (dielectric) properties
- ▶ Sterilizable via multiple methods
- ▶ Clear grades available
- ▶ Resistant to X-ray and microwave radiation

Polyphenylene Ether (PPE)

- ▶ Excellent dimensional stability, low mold shrinkage, and very low creep at elevated temperatures
- ▶ High dielectric strength with excellent electrical properties over a range of temperatures, humidities, and frequencies
- ▶ Good chemical resistance to battery acids, bases, and many cleaning agents
- ▶ Flexible grades available in 92A-63D durometers

Polyphenylene Sulfide (PPS)

- ▶ Excellent flow and low shrinkage for precision molding of connectors and sockets
- ▶ Superior stiffness and mechanical integrity for reliable assembly
- ▶ Inherently flame retardant
- ▶ Suitable for all soldering processes (SMT, IR, lead-free)
- ▶ Excellent chemical resistance at elevated temperatures

Polyphthalamide (PPA)

- ▶ Outstanding electrical properties and high heat resistance allow for electronic components exposed to SMT processing
- ▶ Low moisture uptake resulting in greater dimensional stability
- ▶ Ideal construction material for high temperature, molded interconnecting devices (MIDs) and products requiring lead-free soldering
- ▶ Excellent chemical resistance

Thermoplastic Elastomer (TPE) & Thermoplastic Vulcanizate (TPV)

- ▶ Benchmark ductility for flexible connections and cable jacketing down to -60°C
- ▶ UV and ozone resistant grades available
- ▶ Flexible grades available in durometers ranging from 45-95 shore A
- ▶ Phthalate-free grades for REACH and RoHS compliance

 **ChasePlastics®**
Redefining Resin Distribution®

6467 Waldon Center Drive • Clarkston, MI 48346
248-620-2120 • orders 800-232-4273 • fax 248-620-3192

ChasePlastics.com

The marks identified herein are registered trademarks of their respective owners. Any recommendation by Chase Plastics' personnel for the use of any material is based on tests or experience believed to be reliable. However, since the final processing and use of the product are beyond our control, we make no warranty as to such use or effects incidental to such use, handling or sale. © February 2024, Chase Plastic Services, Inc.

